

# Data sheet

## Drying Oven SLW 115 SIMPLE



The photo above is for reference only, may show additional options not included in standard equipment.  
The real appearance, particularly color and structure of the material may differ from the ones presented in the photo.


### TECHNICAL DATA

air convection	forced
chamber capacity [l] /1/	109
working capacity [l]	109
controller	microprocessor with external display

### TEMPERATURE

temperature range [°C]	+5°C above ambient temperature ... +250°C
temperature resolution every ... [°C]	0,1
over temperature protection	class 1.0 to DIN 12880

CHAMBER	
door type	solid
interior	stainless steel to DIN 1.4016
housing	powder coated sheet
<b>overall dims [mm] /2/</b>	
width A	720
height B	730
depth C	710
<b>Internal dims [mm]</b>	
width D	460
height E	540
depth F	440

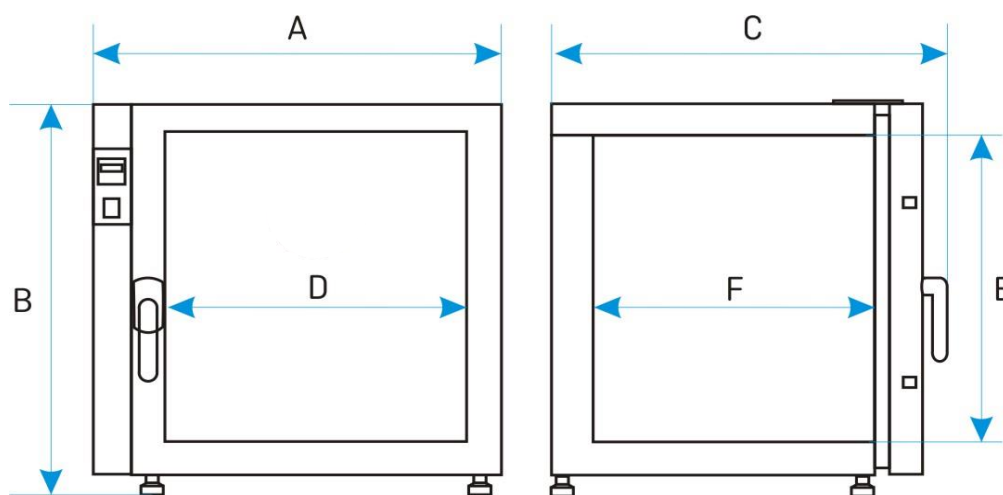

shelves (standard / max)	2 // 7
max shelf workload [kg] /5/	10
max unit workload [kg]	60
weight [kg]	65

ELECTRICAL PARAMETERS	
voltage*	230V 50Hz
nominal power [W]	2500
warranty	24 months
manufacturer	POL-EKO-APARATURA

all the above technical data refer to standard units (without optional accessories)

\* - 230V 60Hz, 115V 60Hz also available

1 - depth doesn't include 50 mm of power cable

#### OPTIONS AND ACCESSORIES



Order number: \*/P INOX

Stainless steel wire shelf



Order number: \*/PP

Perforated shelf



Order number: BRT/\* /L or IQ/OQ/PQ

Calibration and IQ, OQ, PQ qualification

